LOOP-LOC HARDWARE **Basic Cover Hardware (not to scale)**

Brass Anchor Assembly (Short &

Long)

Tamp Tool Used for installing brass anchors.


Pipe (For anchor-in-pipe installations)

LOOP-LOC anchors exactly fit 1" diameter pipe. Cannot be used with wood deck anchors.

3/4

Inside Dia.

Used for concrete decks & anchor-in-pipe installations.




X3/4" X

Spring Covers – Regular & Short

UV treated - Used to protect the spring &

the deck.



Stainless Steel D-Ring

Used in limited deck areas.


1/8" DIA. STAINLESS STEEL

1/32"




1'-3"(15")

Stainless Steel Buckle Used to attach the spring to the strap.



Hex Key

Used for adjusting anchor insert.




1/16 3/8<u>"</u>


'4"

(For brass anchors)

(4) 1/8"DIA. COUNTERSUNK HOLES 3/4" DIA. COUNTERSUNK 17/32" DIA


Wood Deck Anchor Flange






Stainless Steel Springs - Short

Attaches to strap & anchor in limited deck areas. (Note: Use of more than 30% short springs is considered unsafe & voids warranty.)



Metal Installation Rod


Used to install & remove springs from anchors.



Under Cover Padding Section


Size 30"x20' Can trimmed on site. Used for added protection. Installed by dealer at jobsite.

Used to finish or decorate anchor insert.




Stainless Steel Springs - Regular

Attaches to strap & anchor to supply tension to the cover.




Aluminum Tip


Used to crimp the ends of the straps.



Coping Clip Used to prevent marring on aluminum bull nose coping.



On-Ground Hardware (not to scale)

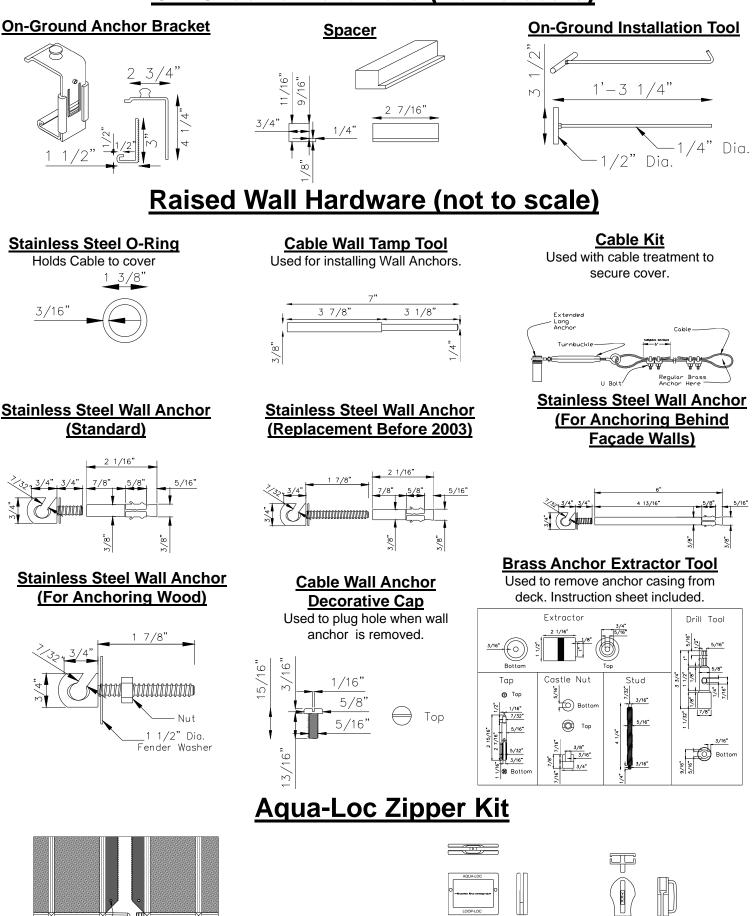

STANLESS S

ADUA - LOC

Locking Block

Slider